


SOLUTIONS THAT COMPLETE!


**GARZ**  **FRICKE**

**SANTOKA 10.1 BX IPS**  
ARM Cortex-A9 Panel Mount

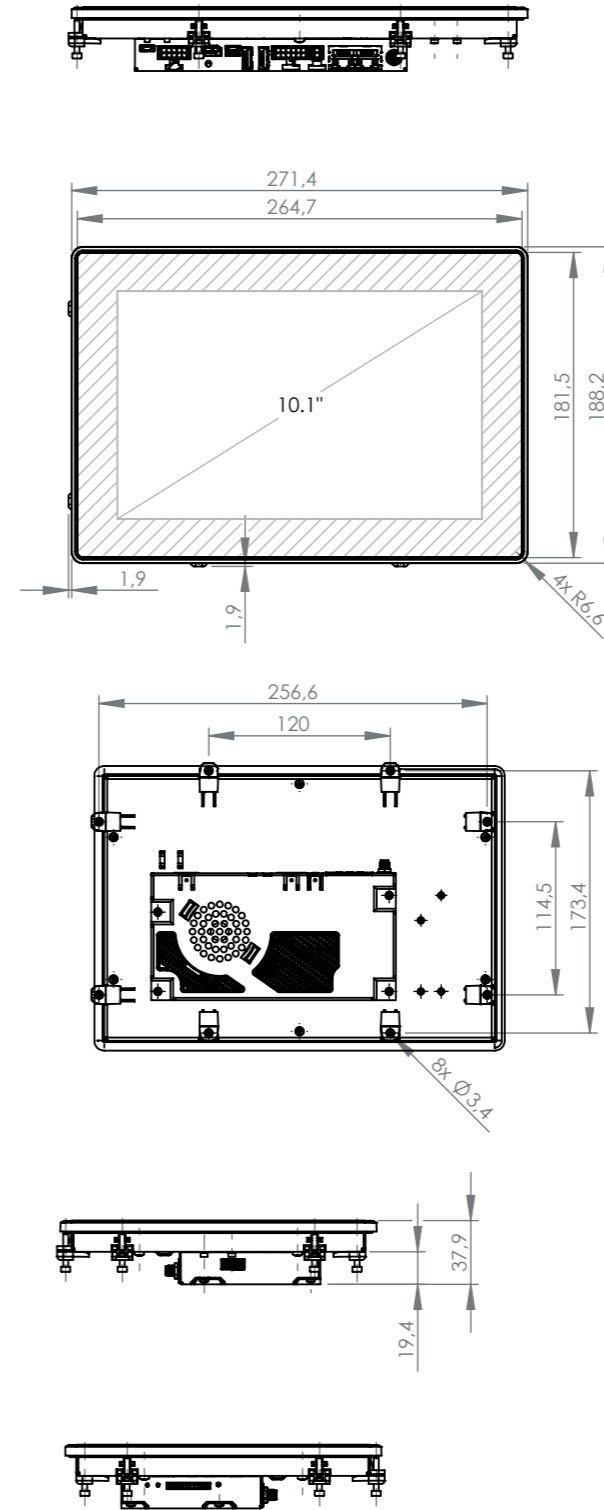

**TECHNICAL SPECIFICATION**  
**SANTOKA 10.1 BX IPS**

CPU	x1	x2
CPU Type	i.MX6Solo	i.MX6Dual
Core Class	ARM Cortex - A9	
Core Clock	1 GHz	
Features	NEON for SIMD media acceleration and VFP operations; Multi-format HD 1080p video decoder and HD 720p video encoder hardware engine; L1 cache, 32 KB for instruction, 32 KB for data	
	512 KB L2 cache	1 MB L2 cache
HW Accelerators	OpenGL ES 2.0, OpenVG 1.1	
RTC	Accuracy: +/- 30 ppm at 25°C	
<b>Memory</b>		
eMMC Flash	4 GB MLC eMMC	
RAM Standard	1 GB 32 bit DDR3L	1 GB 64 bit DDR3L
SD Card Slot	4 bit MMC/SDIO/SD/SDHC	
<b>Operating Systems</b>		
Supported OS	Linux Yocto, Android	
<b>Communication Interfaces</b>		
Network	2x 10/100 Mbit/s Ethernet (RJ-45)	
USB 2.0	2x 480 Mbit/s Host (Type A) 1x 480 Mbit/s OTG (Type Micro-AB)	
CAN Fieldbus / RS-485	1x CAN (ISO/DIS 11898) + 1x RS-485	1x CAN (ISO/DIS 11898) + 1x RS-485 galvanic isolated
RS-232	2x RS-232 (RX/TX/CTS/RTS)	
Synchronous Serial Interfaces	SPI up to 12 chip selects; I <sup>2</sup> C; Matrix keypad up to 8 x 8	
<b>Wireless Communication</b>		
Wireless	WLAN 802.11 b/g/n; Bluetooth 4.0 LE	
<b>Video</b>		
Video output	Full HD HDMI	
<b>Audio</b>		
Speaker output	1x speaker (connector), 1.5W RMS (8Ω)	
Audio Internal	1x speaker 0.3 W RMS (8Ω)	
<b>Display and Touch</b>		
Size	10.1 inch/255.85 mm	
Resolution	1280 x 800 pixel	
Brightness	Typ. 400 cd/m <sup>2</sup>	
Backlight Lifetime	Min. 50 000 h	
Viewing Angle	85°, 85°, 85°, 85° (UDRL)	
Color	24 bit (16.7 Mio. colors)	
Touch	5-wire resistive touch	
<b>Housing</b>		
Metal Parts	1.4016 high quality steel 0.8 mm	
Front	touch is front of 2.8 mm chemically strengthened glass	
<b>Device Dimensions</b>		
W x H x D	275.2 x 192.0 x 37.9 mm	
Weight	1749 g	
<b>Power Supply</b>		
Supply Voltage	Nom. 13 to 32 V DC	
Consumption	Typ. 9.8 W; max. 32.6 W	
<b>Typical Environmental Conditions</b>		
Storage Temp.	-20 to +70 °C	
Operating Temp.	0 to +60 °C	
Humidity	5 to 90 % RH	

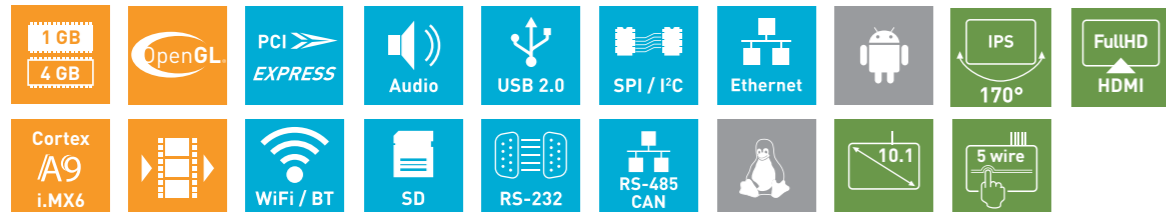

Online support on [www.garz-fricke.com](http://www.garz-fricke.com)

„This product can be modified by alternative assembly. Please contact us for available options.“